


AUTOMATIC HOSE REELS

WELDING

MADE IN ITALY




Rubber hose for welding
Upon request are available other sizes and lengths
Max pressure: 20 bar / 280 Psi
Weight: 25 Kg

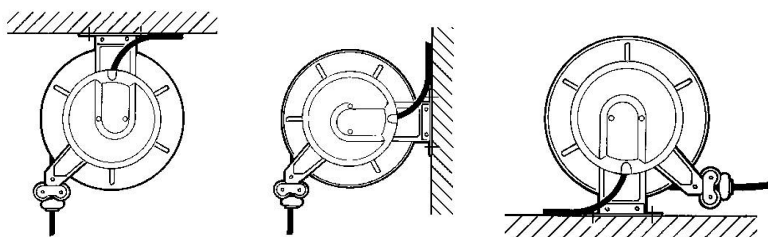

The automatic hose reels of welding range are suitable for distribution for oxygen / acetylene. The hose reels rewind automatically the hose by a spring located in the drum. The hose can be stopped at the desired length. The hot galvanized steel structure is moulded and coated with electrostatic polyester powder resistant to UV rays. The special open construction allows an easy assembly and replacement of the hose and permits control of the rewind-ing. The hose-guide arms can be fixed in three different positions according to the hose reel installation. The models with hose are supplied complete with the flexible hoses for the connection to the system. The rubber twin hoses supplied are manufactured in conformity to the " EN 559 " rule. OPTIONAL: lateral protective covers, flexible hose for the connection to the system, revolving stand, 4-rollers hose guide, anti-derailment bracket, additional bracket for a quick fixing of the hose reel.

ITEM	INLET mm	OUTLET mm	MEASURE	LENGTH
BX17W20M8-14	10	8	8 x 14	20 m / 50 ft
BX17W15M10-17	10	10	10 x 17	15 m / 50 ft

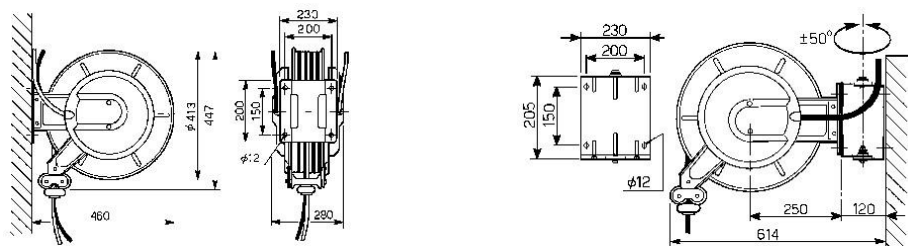

ITEM	INLET mm	OUTLET mm	MEASURE	LENGTH
BX17WG25M8-14	10	8	8 x 14	25 m / 80 ft
BX17WG25M10-17	10	10	10 x 17	25 m / 80 ft

