

CALIBRATED SAFETY VALVES + CE CERTIFIED



MADE IN ITALY

CALIBRATED SAFETY VALVES + CE CERTIFIED

Working temperature with NBR rubber seal -10°C +80°C

Working temperature with VITON rubber seal -10 C +200°C


Valve body EN 12164:98 CW 614N

Spring EN 10270-1-DH

On demand the valves can be produced in STAINLESS STEEL

CALIBRATED

Item	D	F	CH	H	Calibration RANGE (bar)
BX16VST18	5,8	1/8	15	39	0,5 - 15
BX16VST14	5,8	1/4	15	39	0,5 - 15
BX16VST38	6,8	3/8	17	48	0,5 - 18
BX16VST12	10,8	1/2	22	64	4 -16

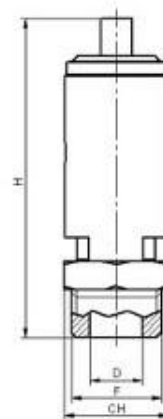

CE CERTIFIED

Item	D	F	CH	H	Calibration RANGE (bar)
BX16VSCE18	5,8	1/8	15	39	0,5 - 15
BX16VSCE14	5,8	1/4	15	39	0,5 - 15
BX16VSCE38	6,8	3/8	17	48	0,5 - 18
BX16VSCE12	10,8	1/2	22	64	4 -16
BX16VSCE34	14	3/4	28	100	2 -18
BX16VSCE10	20,5	1"	38	118	2 -18

