

NON RETURN VALVES



NON RETURN VALVES

Working pressure 16 bar

Working temperature with NBR rubber seal -10 +80°C

Working temperature with VITON rubber seal -10 +200°C


Valve body EN 12164:98 CW 614N

Spring EN 10270-3


Upon request some items are also available with " F " size in FEMALE version

MADE IN ITALY


Item	F	F1	A	D	H	L
BX16VRN102	3/8 F	3/8 M	1/8	9	38	51
BX16VRN105	1/2 F	3/8 M	1/8	9	40	53
BX16VRN114	1/2 F	1/2 M	1/8	11	43	57
BX16VRV118	3/4 F	1/2 M	1/8	11	48	58
BX16VRV120	3/4 F	3/4 M	1/8	16	58	74
BX16VRV123	1" F	1" M	1/8	20	68	89



Item	F	F1	A	D	H	L
BX16VRN185	1/4 M	3/8 M	1/8	6	43	42
BX16VRN132	3/8 M	3/8 M	1/8	9	41	47
BX16VRN108	1/2 M	3/8 M	1/8	9	44	51
BX16VRN113	1/2 M	1/2 M	1/8	11	48	56
BX16VRV117	3/4 M	1/2 M	1/8	11	48	57
BX16VRV179	3/4 M	3/4 M	1/8	16	61	75
BX16VRV121	1" M	3/4 M	1/8	16	58	74



Item	F	F1	A	D	D1	H	L
BX16VRN101	1/4 M	3/8 M	1/8	6	10	43	41
BX16VRN138	3/8 M	3/8 M	1/8	9	10	41	46
BX16VRN133	3/8 M	3/8 M	1/8	9	12	41	46
BX16VRN110	1/2 M	3/8 M	1/8	9	10	44	49
BX16VRN111	1/2 M	3/8 M	1/8	9	12	44	49
BX16VRN127	1/2 M	1/2 M	1/8	11	14	48	53
BX16VRN115	1/2 M	22X1,5 M	1/8	11	15	48	53
BX16VRV116	3/4 M	3/8 M	1/8	9	10	47	51
BX16VRV136	3/4 M	1/2 M	1/8	11	14	48	52
BX16VRV119	3/4 M	22X1,5 M	1/8	11	15	48	52
BX16VRV181	3/4 M	3/4 M	1/8	16	18	61	71

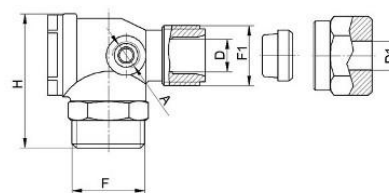

Upon request some items are also available with " F " size in FEMALE version