



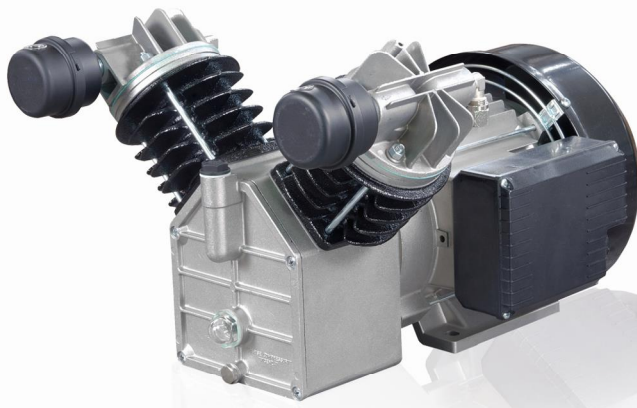

TWO STAGES COMPRESSOR
UNITS WITH DIRECT TRASMISSION

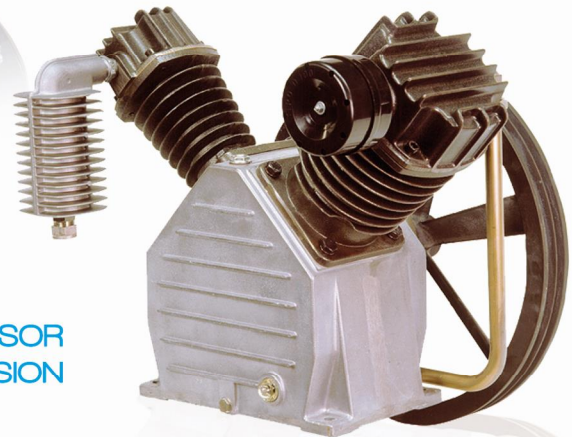

TWO STAGES COMPRESSOR
UNITS WITH BELT TRASMISSION

HIGH PRESSURE TWO STAGES COMPRESSOR UNITS WITH DIRECT TRASMISSION

TECHNICAL SPECIFICATIONS

MODEL	HP	AIR Delivered (L/MIN)	BAR	RPM	Volt/Phase	SIZE	KG
BX46/20B-2M	2	127	20	1400	230/1	34 X 45 X 27	23

HIGH PRESSURE TWO STAGES COMPRESSOR UNITS WITH BELT TRASMISSION

TECHNICAL SPECIFICATIONS

MODEL	HP	AIR Delivered (L/MIN)	BAR	RPM	SIZE	KG
BX48/16B	3	323	16	950	28 X 30 X 39	17
BX48/20B	4	290	20	850	28 X 30 X 39	17
BX48/30B	4	357	30	1050	28 X 30 X 39	17
BX51/16B	5,5	540	16	830	34 X 40 X 48	32
BX51/20B	7,5	630	20	970	34 X 40 X 48	32
BX51/30B	7,5	470	30	720	34 X 40 X 48	32
BX61/16B	7,5	660	16	820	44 X 60 X 50	60
BX61/20B	10	800	20	990	44 X 60 X 50	60
BX61/30B	10	650	30	800	44 X 60 X 50	74,5
BX62/16B	10	930	16	920	51 X 68 X 60	92
BX61/35B	12,5	750	35	850	44 X 60 X 50	85,5
BX62/20B	12,5	930	20	920	51 X 68 X 60	92
BX62/30B	12,5	775	30	760	51 X 68 X 60	92
BX66BOOSTER	10 - 20	600 - 4400	20 - 40	600 - 700	59 X 32 X 88	83